


Iris U.S. Customer Service
800.323.9906
www.irisus.com



USIRISBS13



Made in the USA

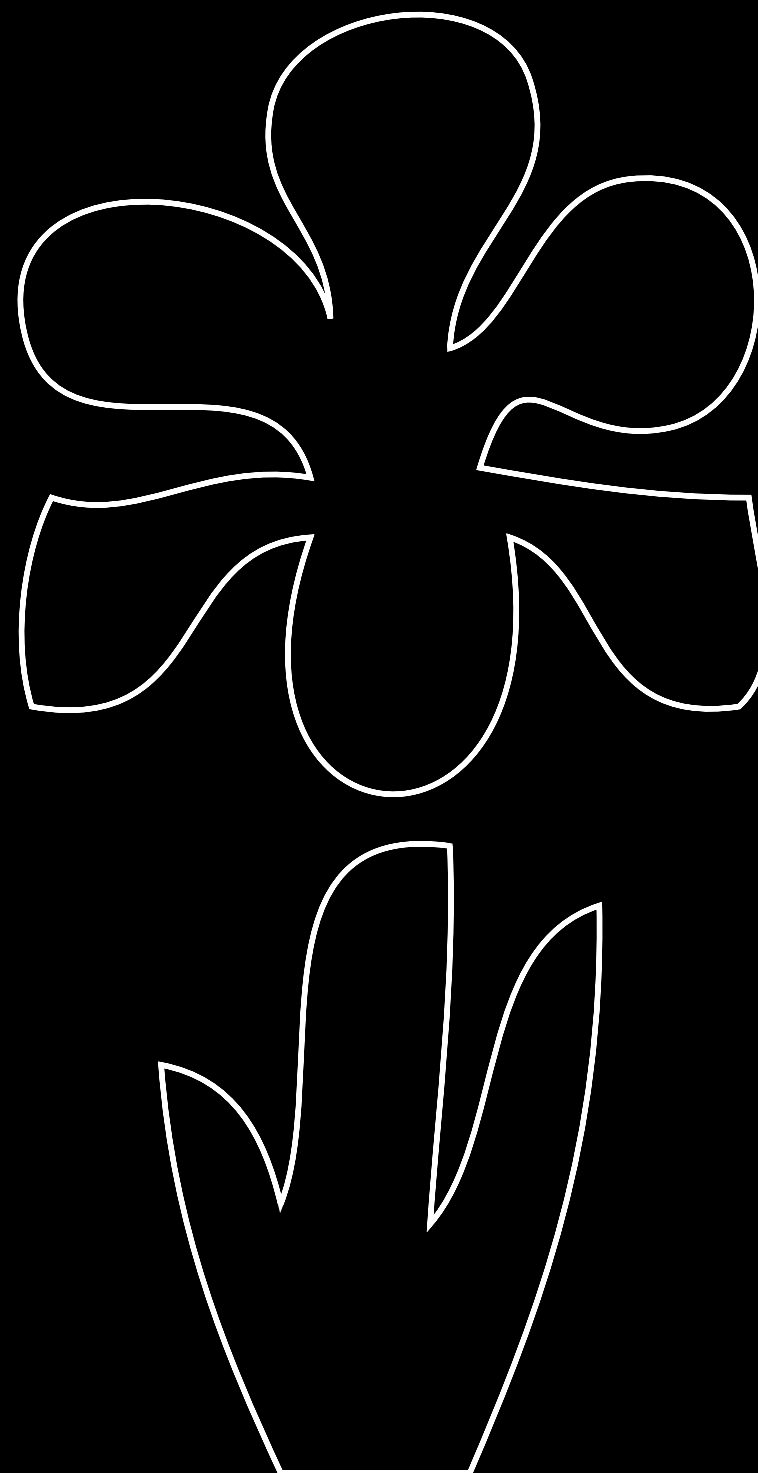

Brush Stroke



Brush Stroke Collection

Create a Linear Look.
a stroke of genius meets design.

Brush Stroke Collection



Oyster Stroke



12 x 24
IRG1224057



6 x 24
IRG0624057



Beige Stroke



12 x 24
IRG1224068



6 x 24
IRG0624068



12 x 12
IRG1212068



Walnut Stroke



12 x 24
IRG1224058



6 x 24
IRG0624058



12 x 12
IRG1212058



Nickel Stroke



12 x 24
IRG1224056



6 x 24
IRG0624056



12 x 12
IRG1212056



Ebony Stroke



12 x 24
IRG1224055



6 x 24
IRG0624055



Nickel Stroke 12" x 24"



Brush Stroke Mosaics

Brush Stroke Trim




Muretto Mosaic

random mesh mounted on 12 x 12 sheet



Lines 01 Mosaic

1 x 12 mesh mounted on 12 x 12 sheet



Brick 01 Mosaic

1 x 2 mesh mounted on 12 x 12 sheet



Liner

1/2 x 24



Bullnose

6 x 24



Cove Base

6 x 12

Oyster Stroke	IRG12M5057
Beige Stroke	IRG12M5068
Walnut Stroke	IRG12M5058
Nickel Stroke	IRG12M5056
Ebony Stroke	IRG12M5055

IRG12ML157
IRG12ML168
IRG12ML158
IRG12ML156
IRG12ML155

IRG12MB157
IRG12MB168
IRG12MB158
IRG12MB156
IRG12MB155

IRG0524L57
IRG0524L68
IRG0524L58
IRG0524L56
IRG0524L55



IRG624BT57
IRG624BT68
IRG624BT58
IRG624BT56
IRG624BT55

IRG612C057
IRG612C068
IRG612C058
IRG612C056
IRG612C055

Oyster Stroke
Beige Stroke
Walnut Stroke
Nickel Stroke
Ebony Stroke



Beige Stroke 6" x 24"

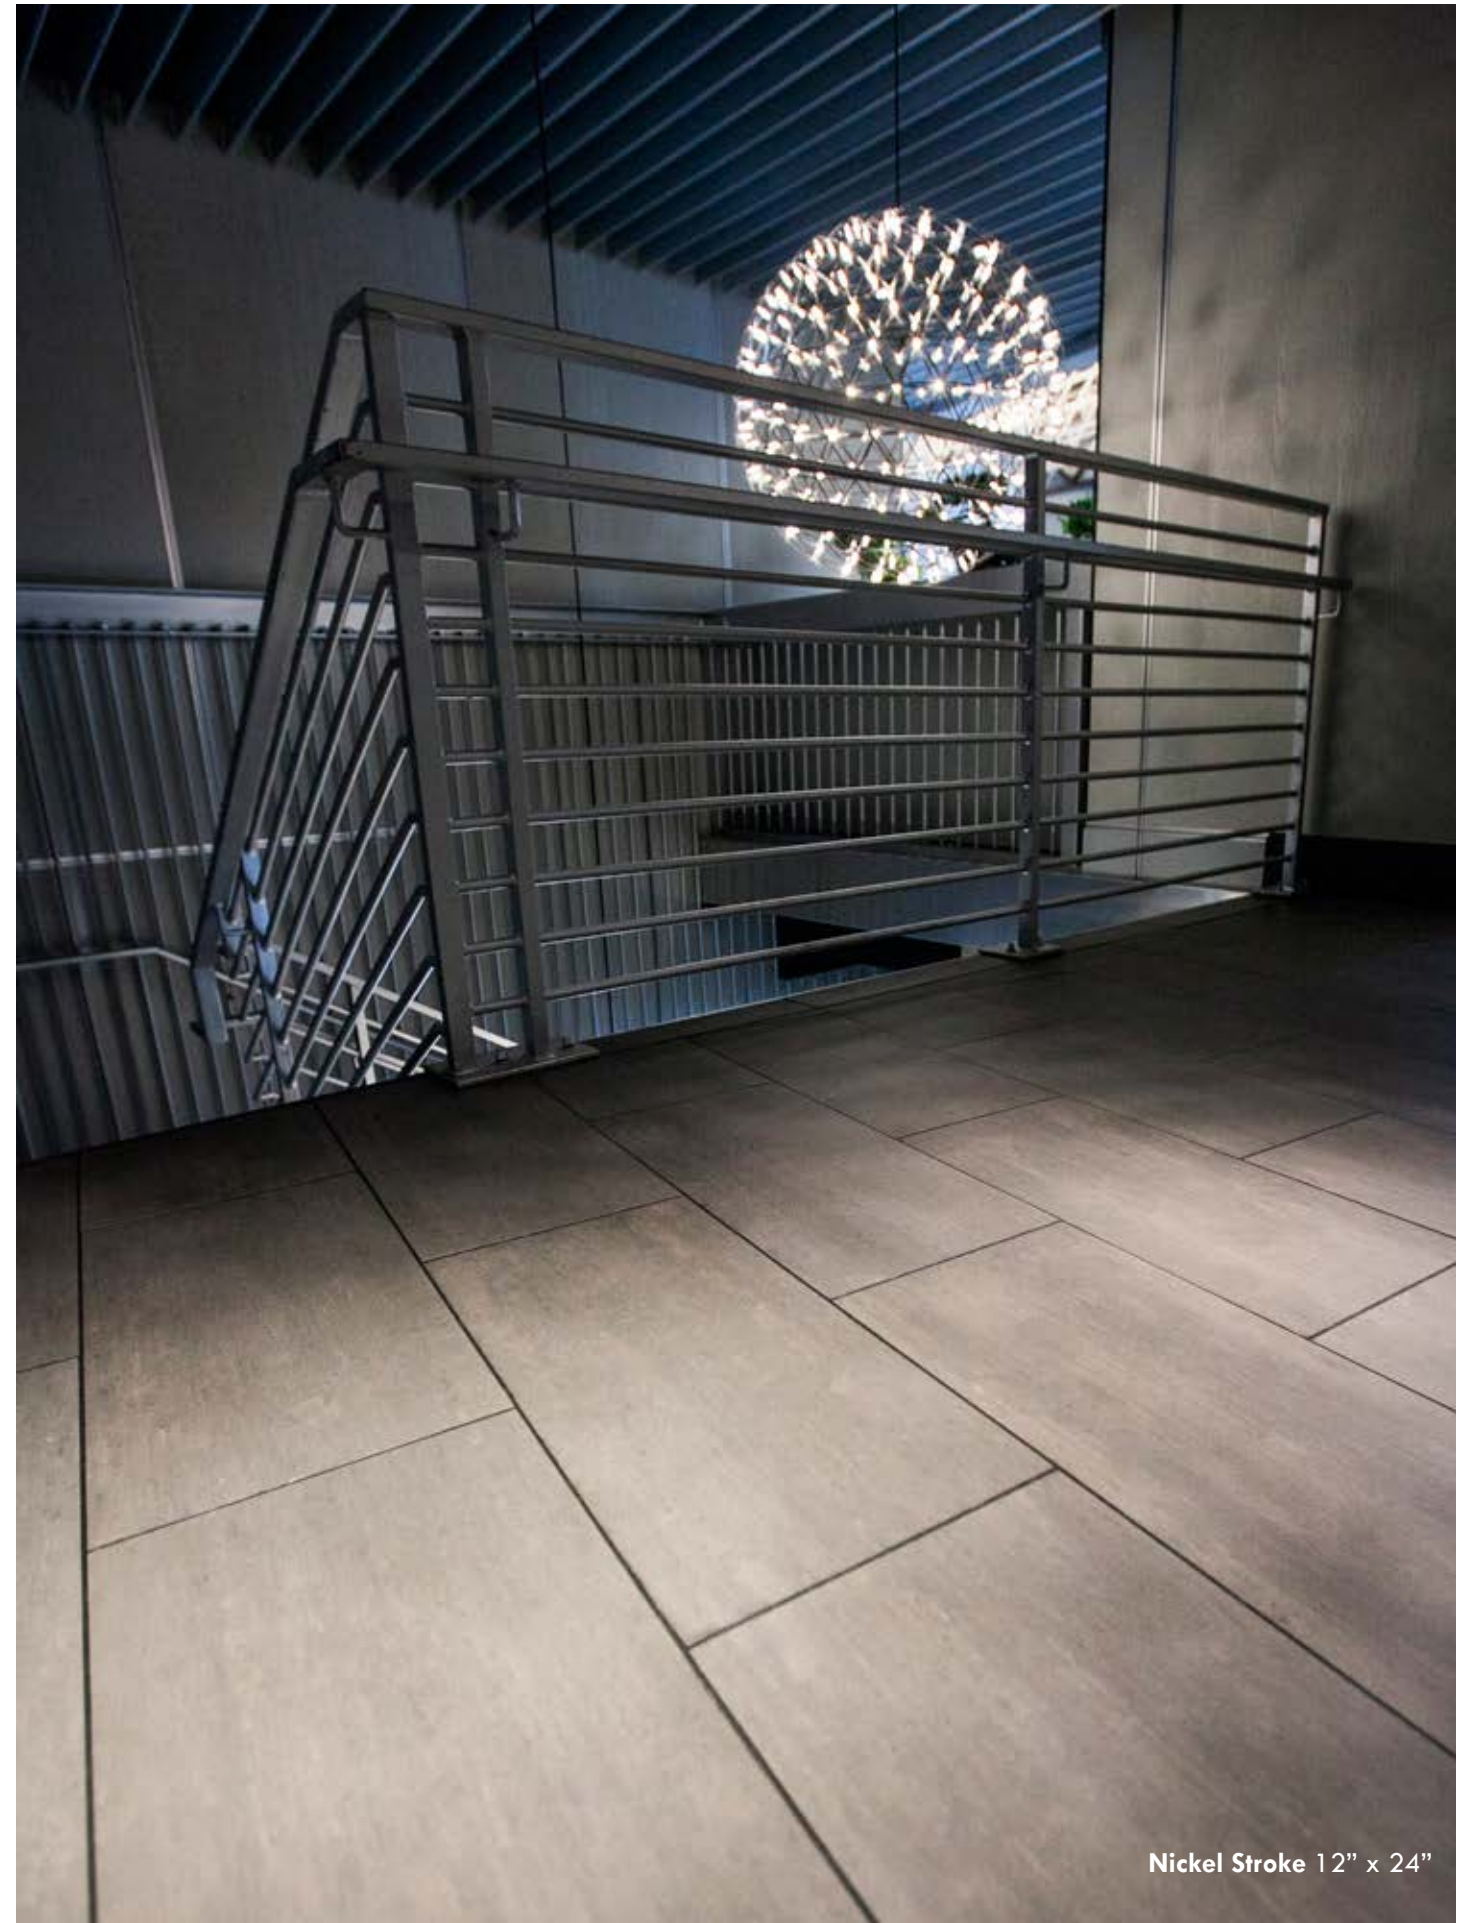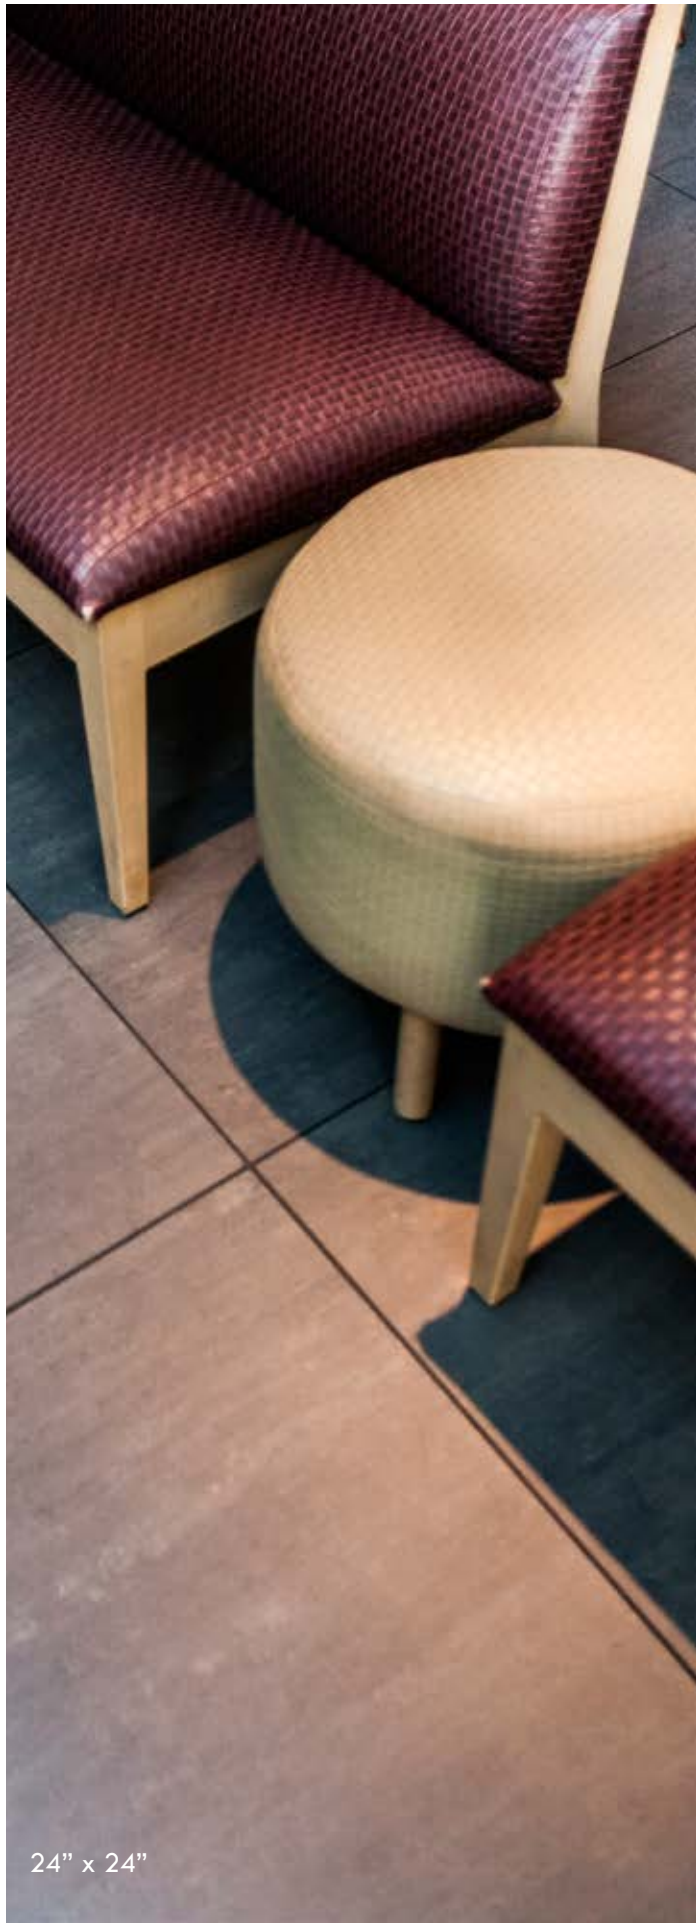



**Oyster Stroke, Beige Stroke
& Ebony Stroke 12" x 24",
12" x 12", 6" x 24" & other
various cut down sizes**



Walnut Stroke 12" x 24"

C1028
COF
Dry ≥ 0.80
Wet ≥ 0.60

Acutest
DCOF
Wet ≥ 0.42

Brush Stroke Tech Specs

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		IRIS US RESULTS COLORED BODY
Water Absorbtion	ASTM C373	0.5% Maximum		≤ 0.1%
Size				
Calibrated (non rectified)	ASTM C499	• Range of Thickness (inch)		≤ 0.040
	ASTM C499	• Average Facial Dimension		≤ ± 0.50%
	ASTM C485	• Warpage		≤ ± 0.75%
	ASTM C485	• Warpage		≤ ± 0.50%
	ASTM C502	• Wedging		≤ ± 0.50%
Rectified	ASTM C499	• Range of Thickness (inch)		≤ 0.040
	ASTM C499	• Average Facial Dimension		≤ 0.25%
	ASTM C485	• Warpage		≤ 0.40%
	ASTM C485	• Warpage		≤ 0.40%
	ASTM C502	• Wedging		≤ 0.25%
Bond Strength	ASTM C482	50 psi or greater		> 200 psi
Deep Abrasion	ASTM C1243	< 175 mm³		< 150 mm³
Hardness (Mohs scale)		No requirement		≥ 7
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred
Chemical Resistance	ASTM C650	No requirement		Class A
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection

Data taken from a representative colored body collection. Individual product testing can be conducted by request.

Coefficient of Friction: All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in areas subject to exposure from grease, oil or water. (All values are based on ASTM C1028 and Acutest DCOF.)

Brush Stroke Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Floor & Wall Tile	12 x 24	8	15.751	32	504.032	8	3.55
	12 x 12	10	9.793	60	587.58	8	3.55
	6 x 24	16	15.585	40	623.4	8	3.55
Mosaics on 12 x 12 Sheet							LB PER PIECE
Muretto	12 x 12	4	3.917	-	-	8	3.55
Lines 01	1 x 12	5	4.896	-	-	8	3.55
Brick 01	1 x 2	5	4.896	-	-	8	3.55
Bullnose	6 x 24	16	15.585	-	-	8	3.55
Cove Base	6 x 12	8	3.88	-	-	8	1.70
Liner	1.5 x 12	4	-	-	-	8	.37