


Slide



Slide Emerald Wall 4" x 12"

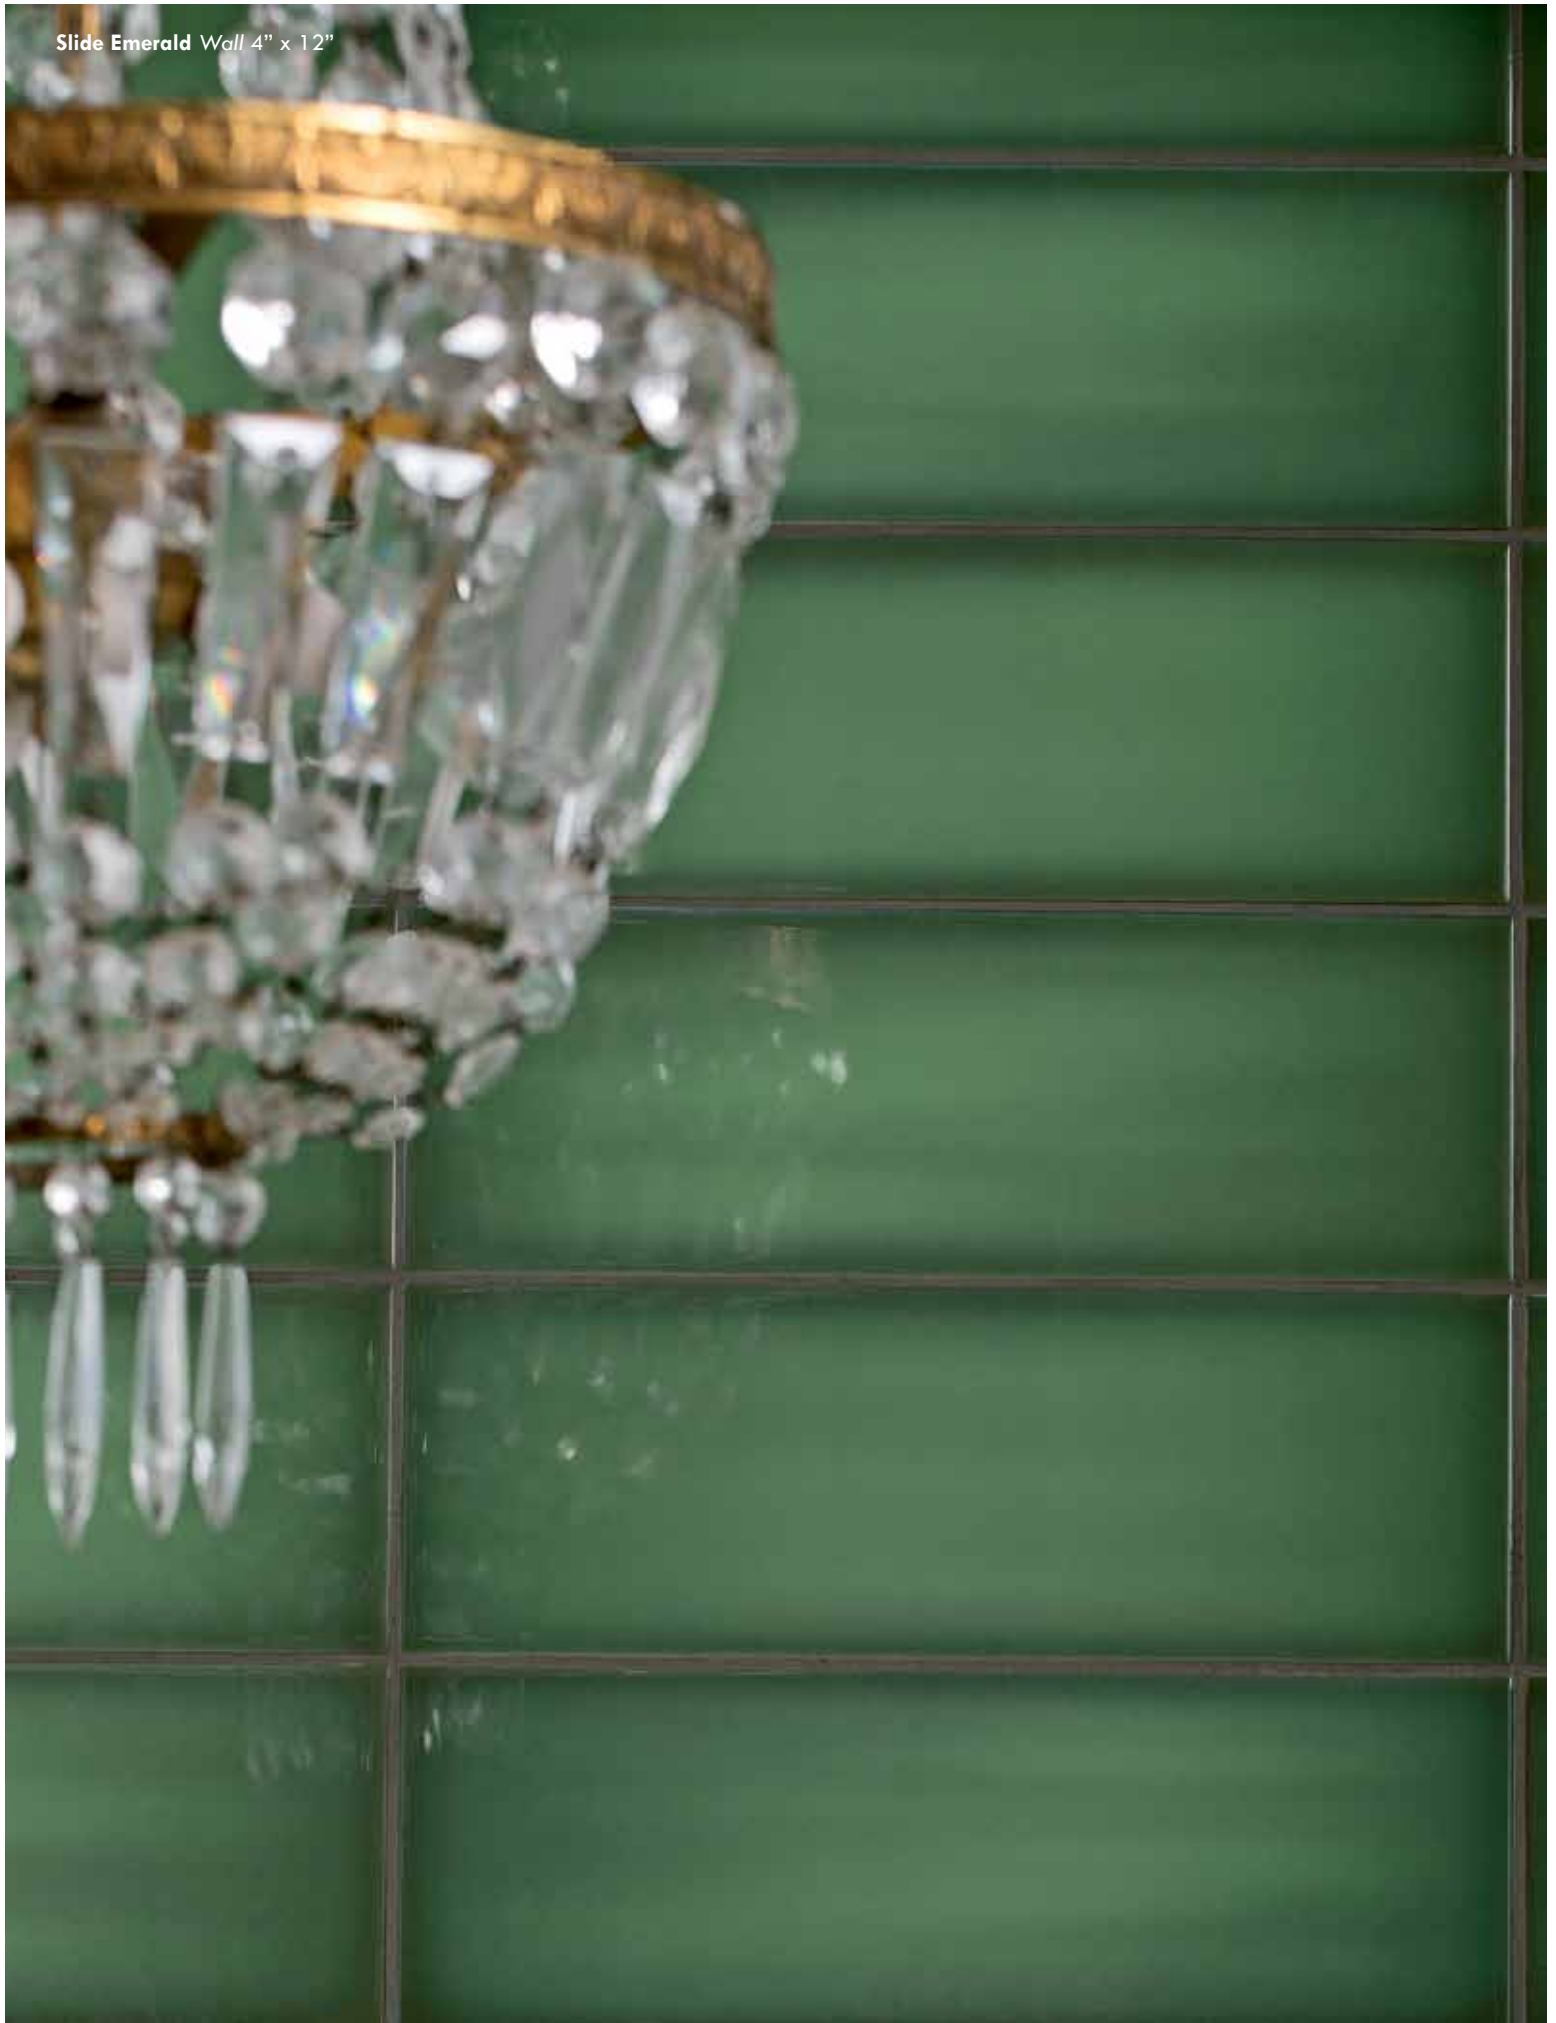

Slide Emerald Wall 4" x 12"






Slide Ocean & Sand Wall 8" x 24"





Slide Grey, White, Ocean, & Emerald Wall 8" x 24"



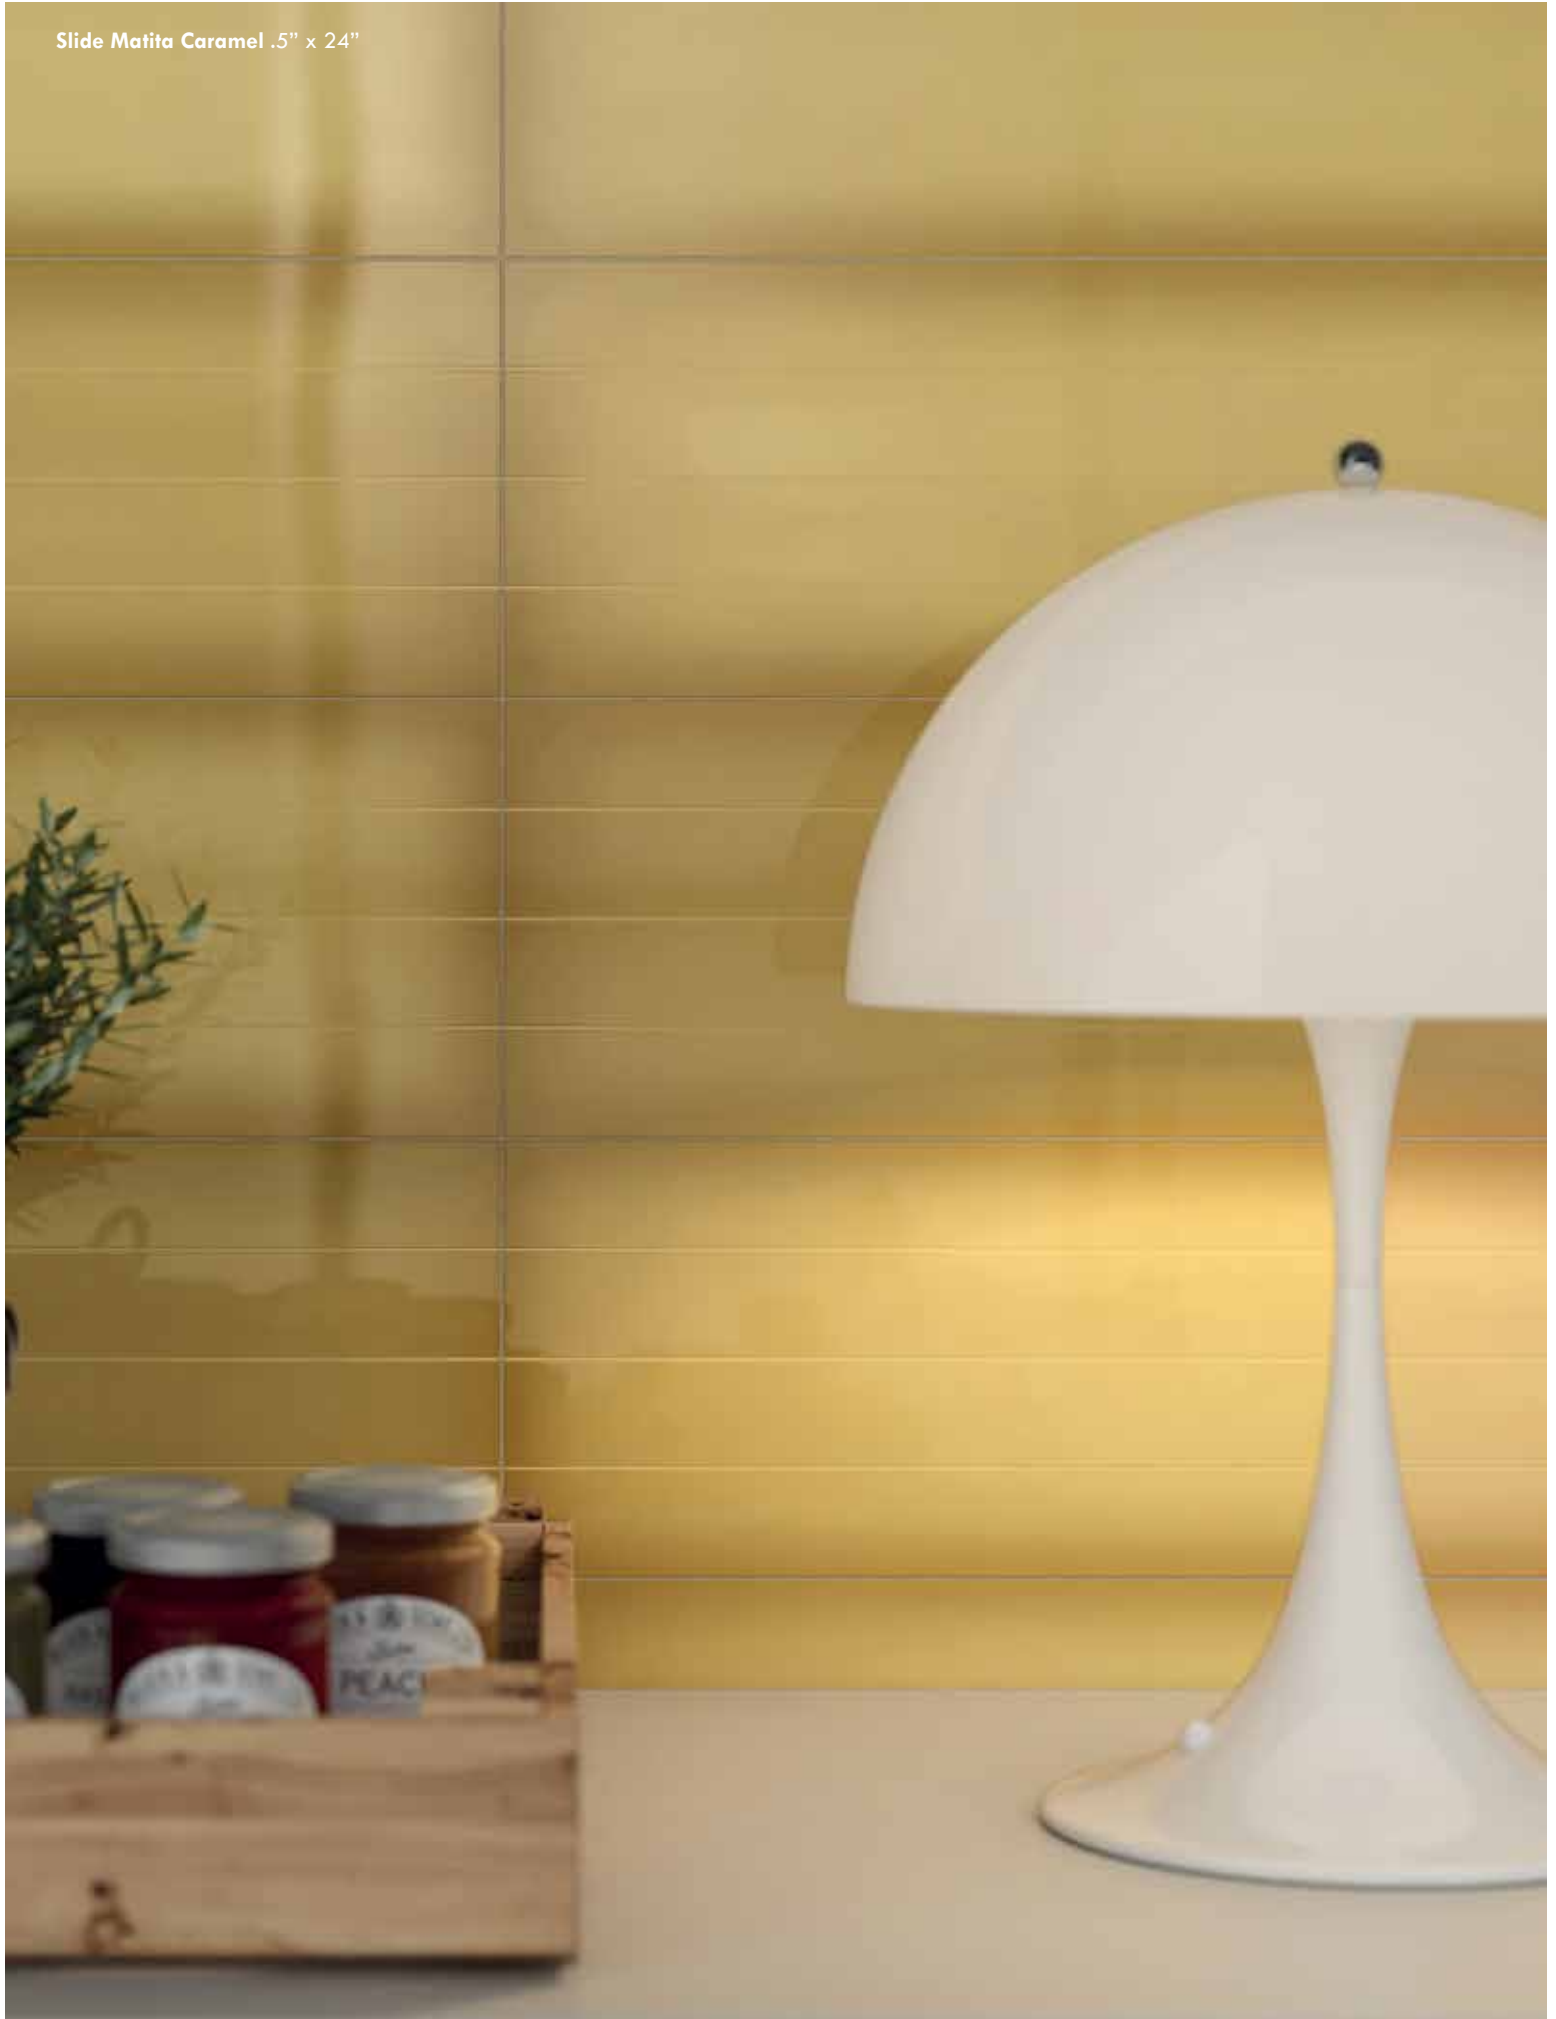

Slide Mink & Caramel Wall 8" x 24"
Slide Matita Caramel .5" x 24"



Slide Mink Wall 4" x 12"





Slide Mink Wall 4" x 12"

Slide Wall Collection



White

8 x 24
Glossy

562221

4 x 12
Glossy

754894



Sand

8 x 24
Glossy

562225

4 x 12
Glossy

754898



Caramel

8 x 24
Glossy

562227

4 x 12
Glossy

754900



Mink

8 x 24
Glossy

562226

4 x 12
Glossy

754899



Emerald

8 x 24
Glossy

562222

4 x 12
Glossy

754895




Ocean

8 x 24
Glossy

562223

4 x 12
Glossy

754896

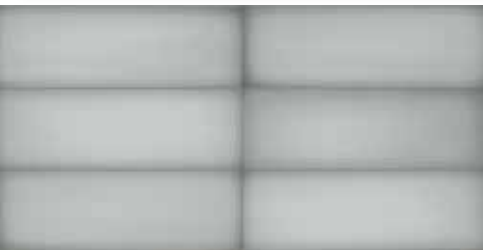

Grey

8 x 24
Glossy

562224

4 x 12
Glossy

754897





Slide Grey & White Wall 4" x 12"

Slide Matita

Matita White

.5 x 24

Glossy

861545

Matita Sand

.5 x 24

Glossy

861544

Matita Caramel

.5 x 24

Glossy

861540

Matita Mink

.5 x 24

Glossy

861546

Matita Emerald

.5 x 24

Glossy

861541

Matita Ocean

.5 x 24

Glossy

861542

Matita Grey

.5 x 24

Glossy

861543

DI SEGALE
AI SEMI DI PAPAVER
AI SEMI DI SESAMO
INTEGRALE



Slide Wall Tech Specs

PHYSICAL PROPERTIES

CALIBRATED

Nominal Size

Caliber Range

Warpage Edge

Warpage Diagonal

Wedging

RECTIFIED

Nominal Size

Caliber Range

Warpage Edge

Warpage Diagonal

Wedging

ALL GLAZED WALL TILE

Mounting

Thickness³

Bond Strength

Water Absorption

Color Uniformity²

Crazing Resistance

Thermal Shock

Chemical Resistance

Stain Resistance

Breaking Strength

Resistance to Freeze/Thaw Cycling⁴

TEST

ASTM C499

Variation from average facial dimension of sample,
tested per ASTM C499

ASTM C485

ASTM C485

ASTM C502

ASTM C499

Variation from average facial dimension of sample,
tested per ASTM C499

ASTM C485

ASTM C485

ASTM C502

Section 9.5

ASTM C499

ASTM C482

ASTM C373

ASTM C609 and Section 9.3

ASTM C424

ASTM C484

ASTM C650

ASTM C1378

ASTM C648

ASTM C1026

GLAZED WALL TILE SPECIFICATION⁵

MINIMUM

-2.00%

-0.30% or -0.04 in (1.0 mm)¹

-0.30% or -0.04 in (1.0 mm)¹

-0.30% or -0.05 in (1.3 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

-2.00%

-0.25% or -0.03 in (0.8 mm)¹

-0.30% or -0.04 in (1.0 mm)¹

-0.30% or -0.05 in (1.3 mm)¹

-0.25% or -0.03 in (0.8 mm)¹

Pass

N/A

≥ 50 psi (0.34 MPa)

P4

N/A

Pass

Pass

As Reported

As Reported

Average ≥ 125 lbf. (1.11 kN) / Individual
≥ 100 lbf. (0.44 kN)

As Reported

MAXIMUM

2.00%

-0.30% or -0.04 in (1.0 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

-0.40% or -0.07 in (1.8 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

2.00%

-0.25% or -0.03 in (0.8 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

-0.40% or -0.07 in (1.8 mm)¹

-0.25% or -0.03 in (0.8 mm)¹

Pass

Range: 0.031 in (0.079 mm)

P4

VO - 3 Judds

As Reported

As Reported

As Reported

¹ Whichever is less ² Class VO Tile Only ³ May not apply to textured surfaces or tiles with uneven back patterns ⁴ When installation subject to freeze/thaw conditions

⁵ These specifications do not include pressed floor tile, porcelain tile, quarry tile, nor mosaics, when used on walls.

Slide Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Wall Tile	8 x 24	12	15.49	48	743.71	7	2.36
	4 x 12	34	10.98	80	878	7	2.83

Color Shade Variations

As in nature, our products vary piece to piece. Please refer to the graph for variations.



V1

Difference among pieces
from the same color
are minimal



V2

Shade variance
within the
same color



V3

Significant shade
variation within the
same color



V4

Extreme shade variation,
piece to piece, within the
same color

Iris U.S. Customer Service

800.323.9906

www.irisus.com



USIRISL17